PROBIZZ™

An ISO 9001:2015 Company

MODULAR
PARTITION SYSTEM

Our Certifications

NSIC ISO 9001 : 2008
National Small Industries Corporation
राष्ट्रीय लघु उद्योग निगम लिमिटेड

CE

ISO 9001:2015

MSME
सूक्ष्म , लघु एवं मध्यम उद्यम
MICRO, SMALL & MEDIUM ENTERPRISES

#startupindia

GeM Government e Marketplace

EUROPEAN NORM EN

UL

IST

INTRODUCTION

PROBIZZ™

INSPIRING PRODUCTS ✪ AGGRESSIVE PRICING ✪ ADMIRABLE SERVICES

PROBIZZ is an ISO 9001:2015 certified company and a growing name in the field of architectural hardware solutions. We are providing complete hardware solutions for doors and windows (Timber, Glass & Metal),Furniture hardware, Shower Cubicle Fittings, Spider Fittings and Bathroom accessories. PROBIZZ products carry the hallmark of trust & reliability. We offer the widest range of products in the industry to our esteemed clients.

Our products are CE certified & we can cater all architectural hardware requirements for your residential, commercial and industrial buildings . We are using the most sophisticated, advance technology and techniques to ensure the best quality. All our products are guaranteed against any manufacturing defect and faulty workmanship. We believe in fairness, transparency and professional dealings, we practice excellence and innovation. We have spectacular range of designs which suits the taste and budget of our all esteemed clients. **PROBIZZ** offers complete solutions which are extremely secure, robust and easy to install and operate. They are flexible to meet the challenges & expectations of the modern day Architect & Designers. We are also providing key alike, complex Master Key & Grand Master Key Solutions.

We are having dedicated team for Marketing, Finance, Logistics and Service. We are associated with well-known logistic companies for door step delivery within agreed time frame across the country and abroad.

We are having distribution network across the country and apart from India we are present in more than a dozen countries of **AFRICA, MIDDLE EAST, SOUTH ASIA & SOUTH EAST ASIA.**

PROBIZZ™

CONTENTS

OFFICE PARTITIONS
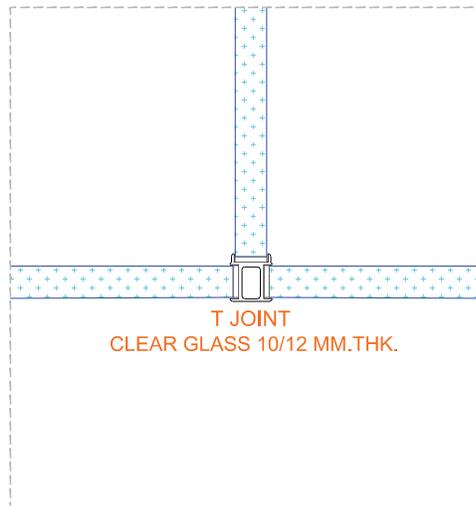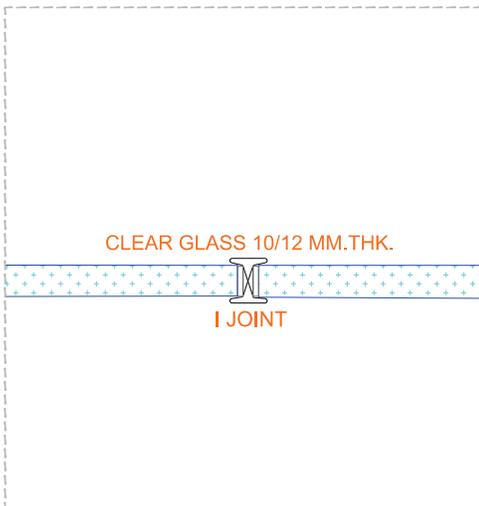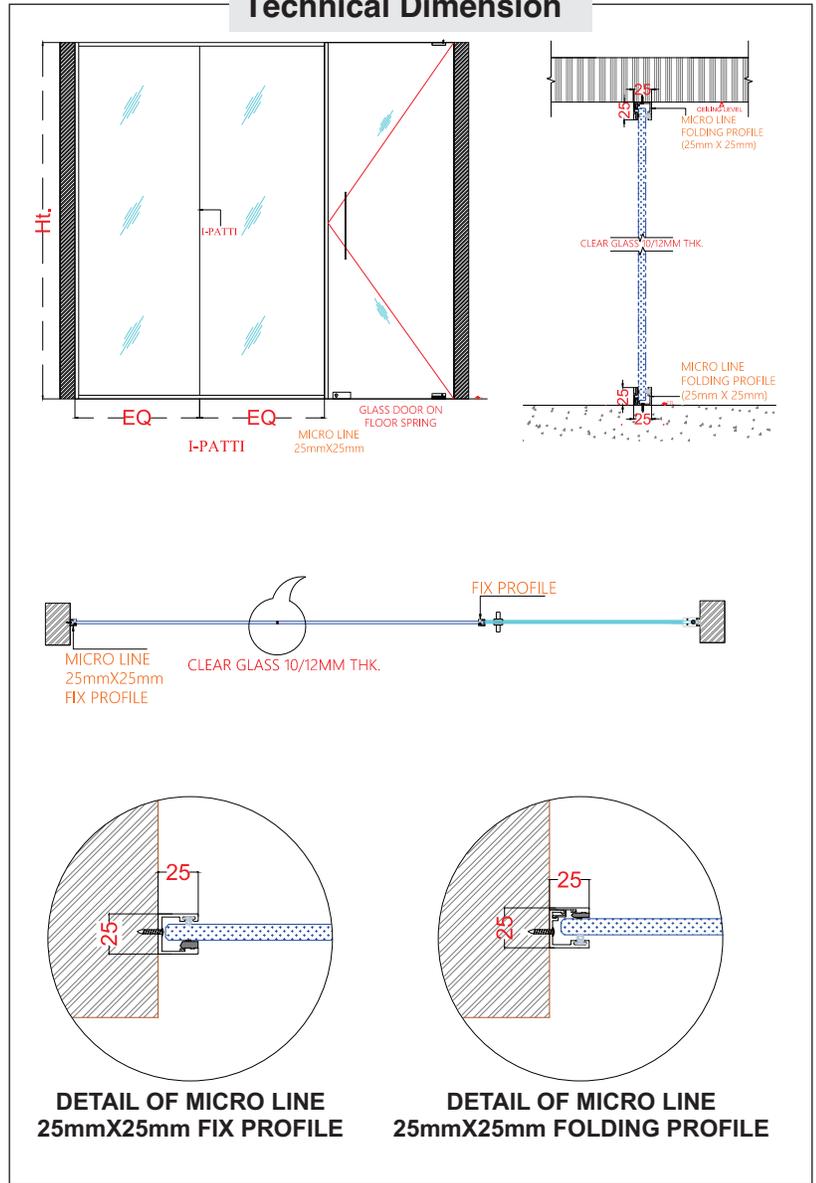
DEMOUNTABLE ALUMINUM PARTITION SYSTEM

PRODUCT CODE **SLIM LINE 25**
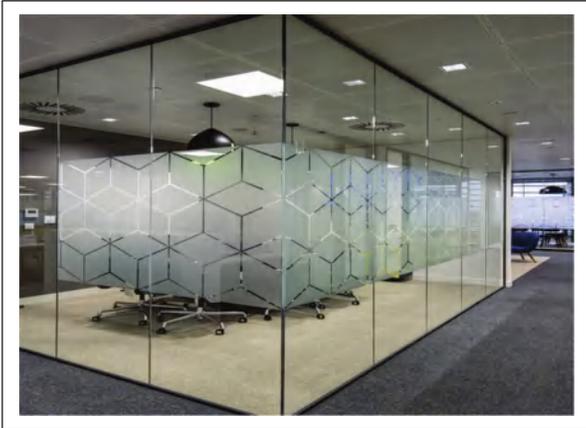
Technical Specification

- Profile - 25mm X 25mm.
- Available Finishes – Black Matt / Silver Matt / Black Brush Finish/Silver
- Brush Finish/SS Brush Finish /SS Glossy Finish/Rose Gold /Powder Coat /or any other Anodized finishes Available.
- Partition Height upto 3000mm. (10ft.).
- Single Glaze system.
- Glass Thickness - 10/12mm.
- Door Options - Frameless Door, Sliding Door, Auto Door Closer, Floor spring.
- Sound insulation – 32 / 36db.
- Easy Maintenance.

Technical Dimension

DETAIL OF MICRO LINE 25mmX25mm FIX PROFILE

DETAIL OF MICRO LINE 25mmX25mm FOLDING PROFILE

CLEAR GLASS 10/12 MM.THK.
I JOINT

DETAIL OF 'I' JOINT PROFILE

T JOINT
CLEAR GLASS 10/12 MM.THK.

DETAIL OF 'T' JOINT PROFILE

CLEAR GLASS 10/12 MM.THK.
L JOINT

DETAIL OF 'L' JOINT PROFILE

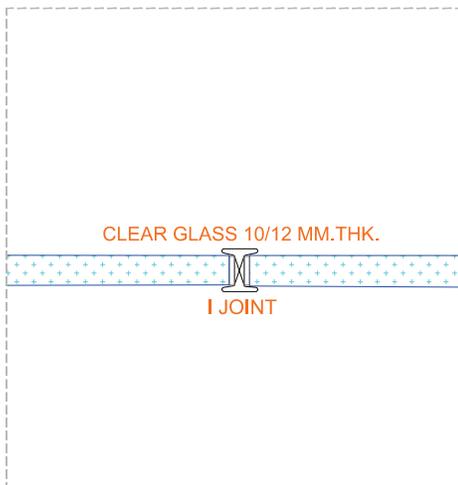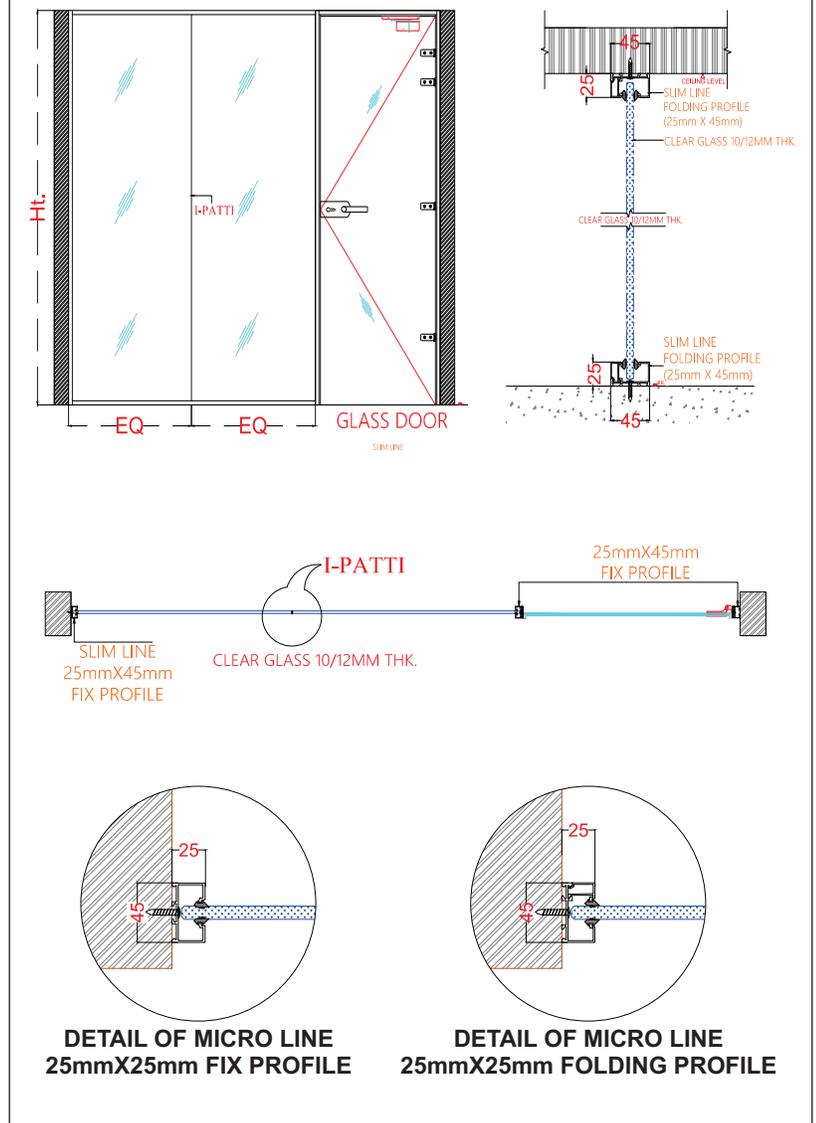## DEMOUNTABLE ALUMINUM PARTITION SYSTEM

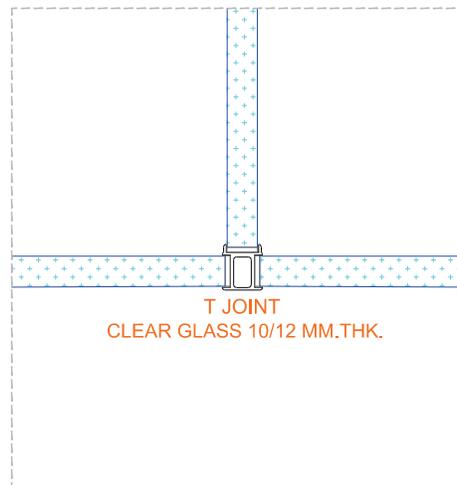**PRODUCT CODE** ▶ **SLIM LINE 45**

Technical Specification

- Profile - 25mm X 45mm.
- Available Finishes – Black Matt / Silver Matt / Black Brush Finish/Silver
- Brush Finish/SS Brush Finish /SS Glossy Finish/Rose Gold /Powder Coat /or any other Anodized finishes Available.
- Partition Height upto 3600mm. (12ft.).
- Single Glaze system.
- Glass Thickness - 8/10/12mm.
- Door Options - Frameless Door, Style Door, Solid Wooden Door, Sliding door, Style sliding door, Floor spring,, Overhead Door closer, Concealed Door closer.
- Door Accessories - Lock Body/Cylinder, Glaskar Hinges, Glaskar Locks, Access Control-Auto Attendance Machine, Face recognition access can be incorporated.
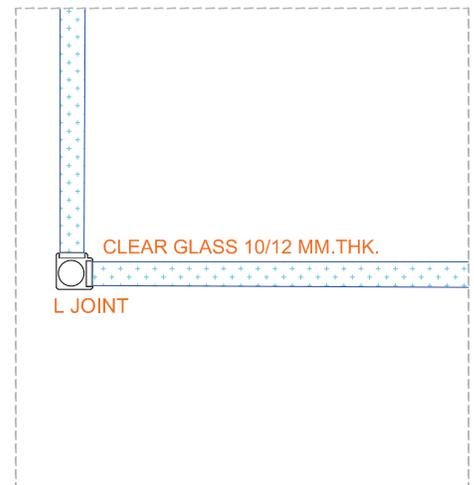- Easy Maintenance.
- Sound insulation – 32 / 36db.
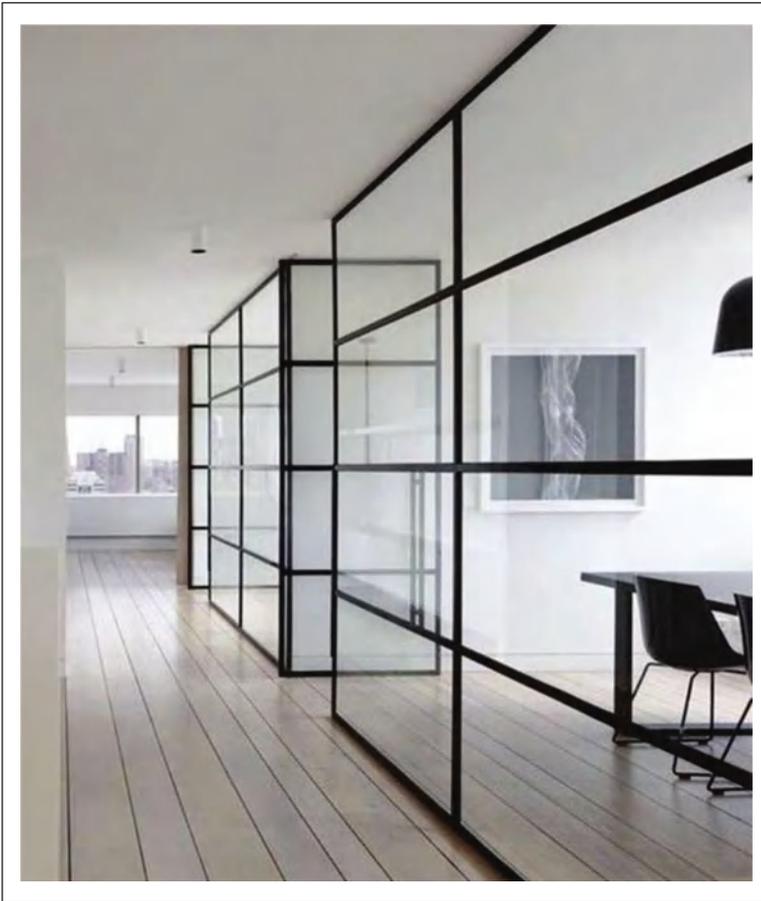
Technical Dimension

DETAIL OF MICRO LINE 25mmX25mm FIX PROFILE

DETAIL OF MICRO LINE 25mmX25mm FOLDING PROFILE

CLEAR GLASS 10/12 MM.THK.

I JOINT

DETAIL OF 'I' JOINT PROFILE

T JOINT
CLEAR GLASS 10/12 MM.THK.

DETAIL OF ' T ' JOINT PROFILE

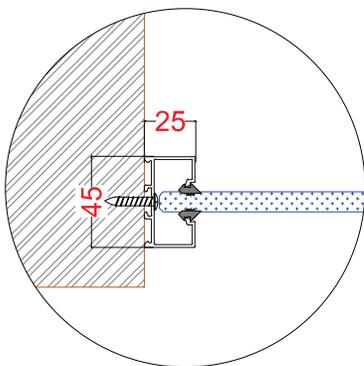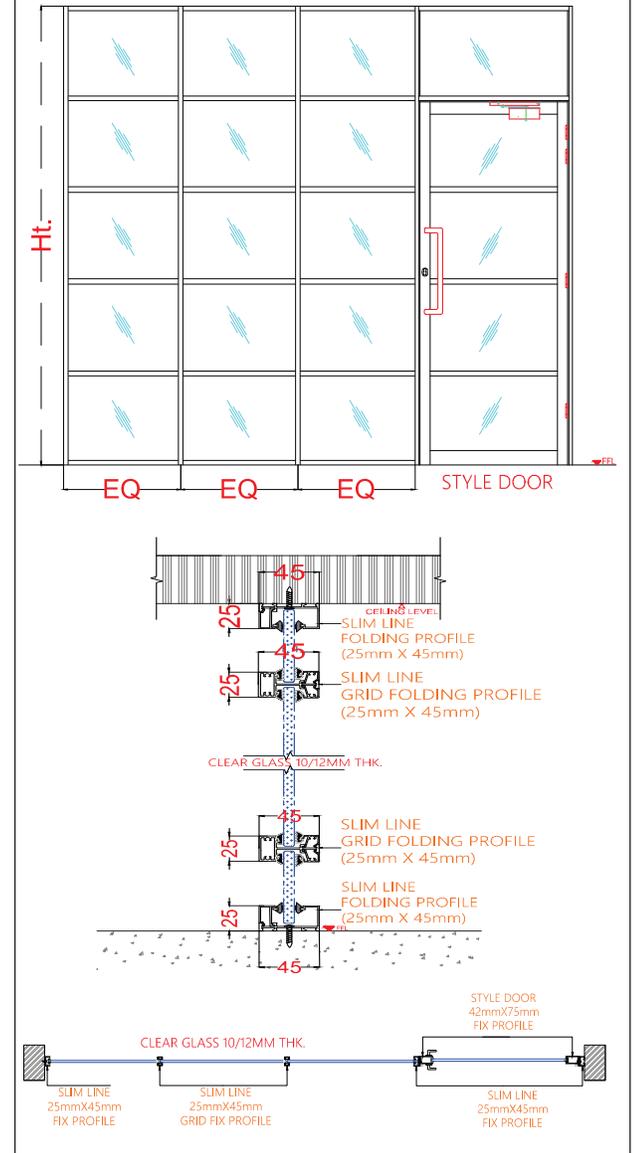CLEAR GLASS 10/12 MM.THK.

L JOINT

DETAIL OF 'L' JOINT PROFILE

DEMOUNTABLE ALUMINUM PARTITION SYSTEM

PRODUCT CODE ▶ **SLIM LINE GRID 45**

Technical Dimension

Ht.

EQ   EQ   EQ   STYLE DOOR

45
25   GEILING LEVEL
SLIM LINE
FOLDING PROFILE
(25mm X 45mm)
45
25   SLIM LINE
GRID FOLDING PROFILE
(25mm X 45mm)
CLEAR GLASS 10/12MM THK.
45
25   SLIM LINE
GRID FOLDING PROFILE
(25mm X 45mm)
25   SLIM LINE
FOLDING PROFILE
(25mm X 45mm)
45

STYLE DOOR
42mmX75mm
FIX PROFILE

CLEAR GLASS 10/12MM THK.

SLIM LINE
25mmX45mm
FIX PROFILE

SLIM LINE
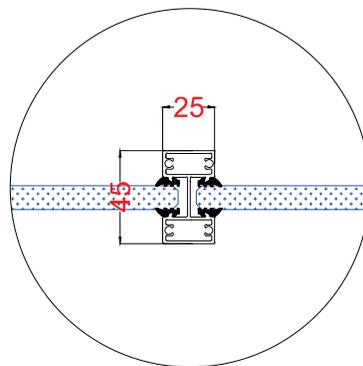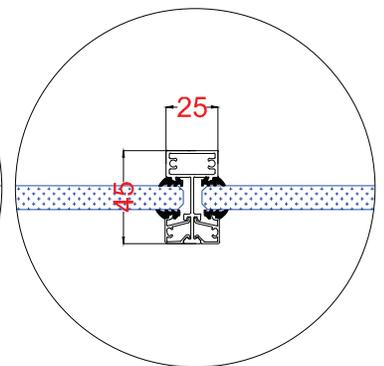25mmX45mm
GRID FIX PROFILE

SLIM LINE
25mmX45mm
FIX PROFILE

**DETAIL OF
SLIM LINE
25mmX45mm
FIX PROFILE**
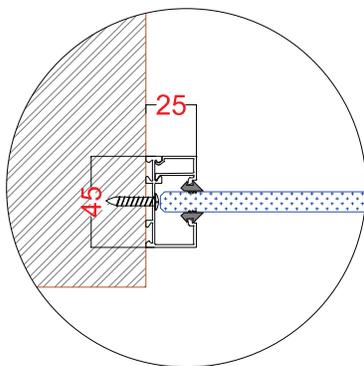
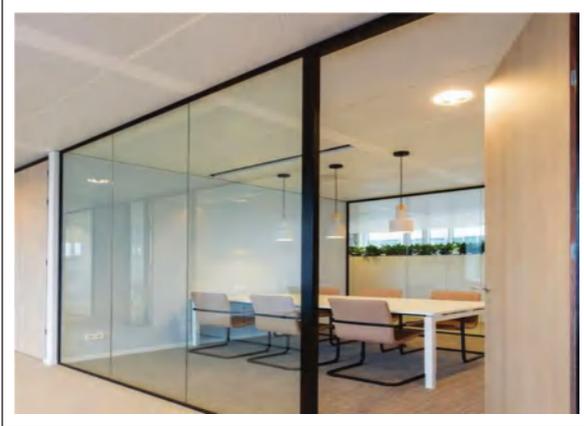**DETAIL OF
SLIM LINE
25mmX45mm
FOLDING PROFILE**

**DETAIL OF
SLIM LINE
25mmX45mm
GRID FIX PROFILE**

**DETAIL OF
SLIM LINE
25mmX45mm
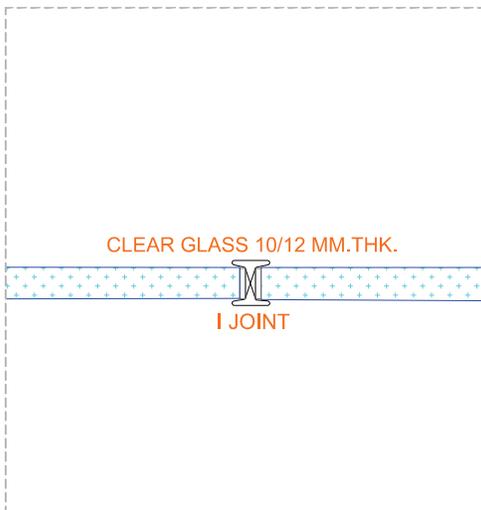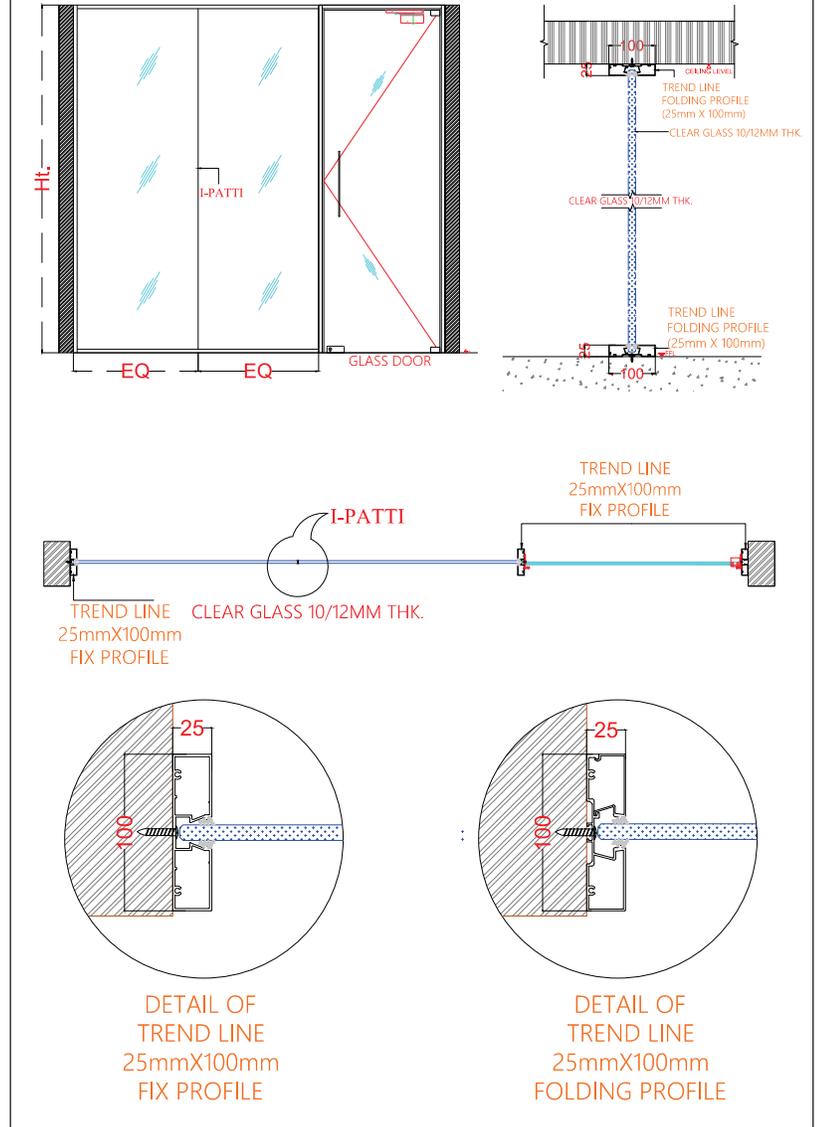GRID FOLDING PROFILE**

DEMOUNTABLE ALUMINUM PARTITION SYSTEM

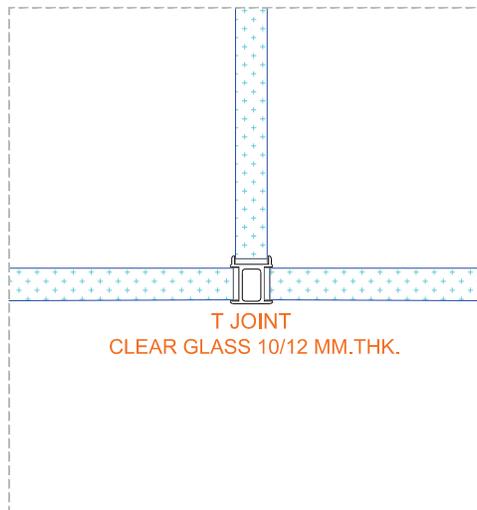| PRODUCT CODE | TREND LINE 100 |

Technical Dimension

Technical Specification

➤ Profile - 25mm X 100mm.

➤ Available Finishes – Black Matt / Silver Matt / Black Brush Finish/Silver

➤ Brush Finish/SS Brush Finish /SS Glossy Finish/Rose Gold /Powder Coat / or any other Anodized finishes Available.

➤ Partition Height upto 3600mm. (12ft.).

➤ Single Glaze system.

➤ Glass Thickness - 8/10/12mm.

➤ Door Options- Frameless Door, Style Door ,Sliding door, Solid wooden door.

➤ Door Accessories - Access Control-Auto Attendance Machine, Face recognition access.

➤ Easy Maintenance.

➤ Sound insulation – 32 / 36db.

I-PATTI
EQ   EQ   GLASS DOOR
Ht.

TREND LINE FOLDING PROFILE (25mm X 100mm)
CLEAR GLASS 10/12MM THK.
CLEAR GLASS 10/12MM THK.
TREND LINE FOLDING PROFILE (25mm X 100mm)
100

TREND LINE 25mmX100mm FIX PROFILE
I-PATTI
TREND LINE 25mmX100mm FIX PROFILE
CLEAR GLASS 10/12MM THK.

25
100
DETAIL OF TREND LINE 25mmX100mm FIX PROFILE

25
100
DETAIL OF TREND LINE 25mmX100mm FOLDING PROFILE

CLEAR GLASS 10/12 MM.THK.
I JOINT

T JOINT
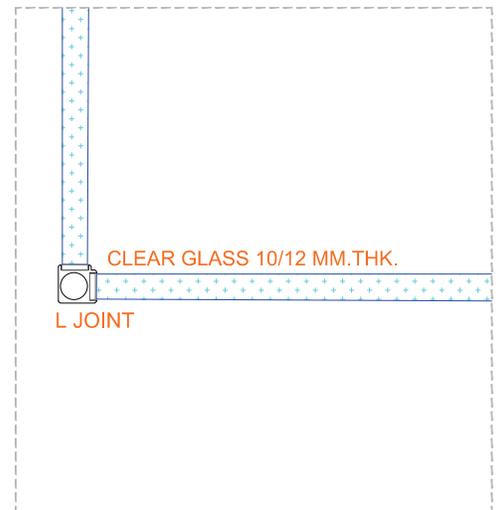CLEAR GLASS 10/12 MM.THK.

CLEAR GLASS 10/12 MM.THK.
L JOINT

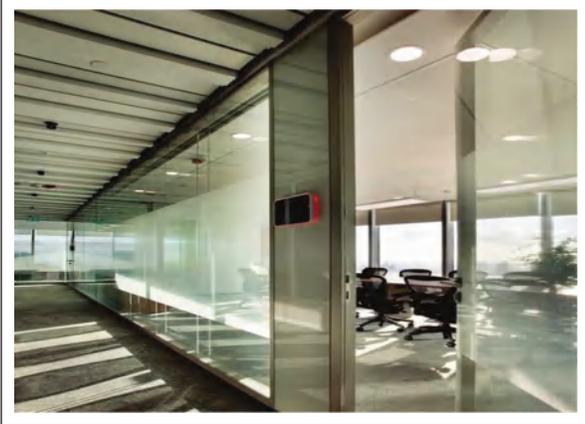**DETAIL OF 'I' JOINT PROFILE**

DETAIL OF ' T ' JOINT PROFILE

DETAIL OF 'L' JOINT PROFILE
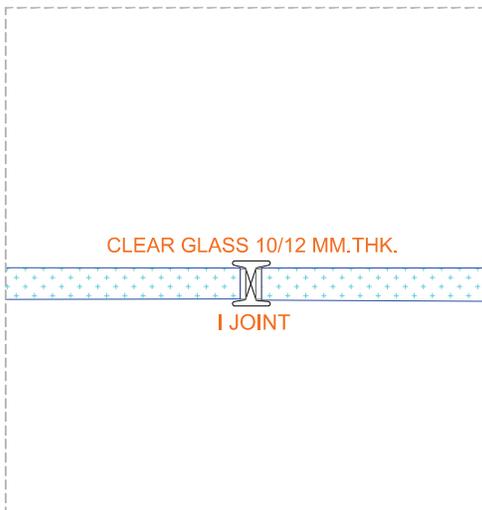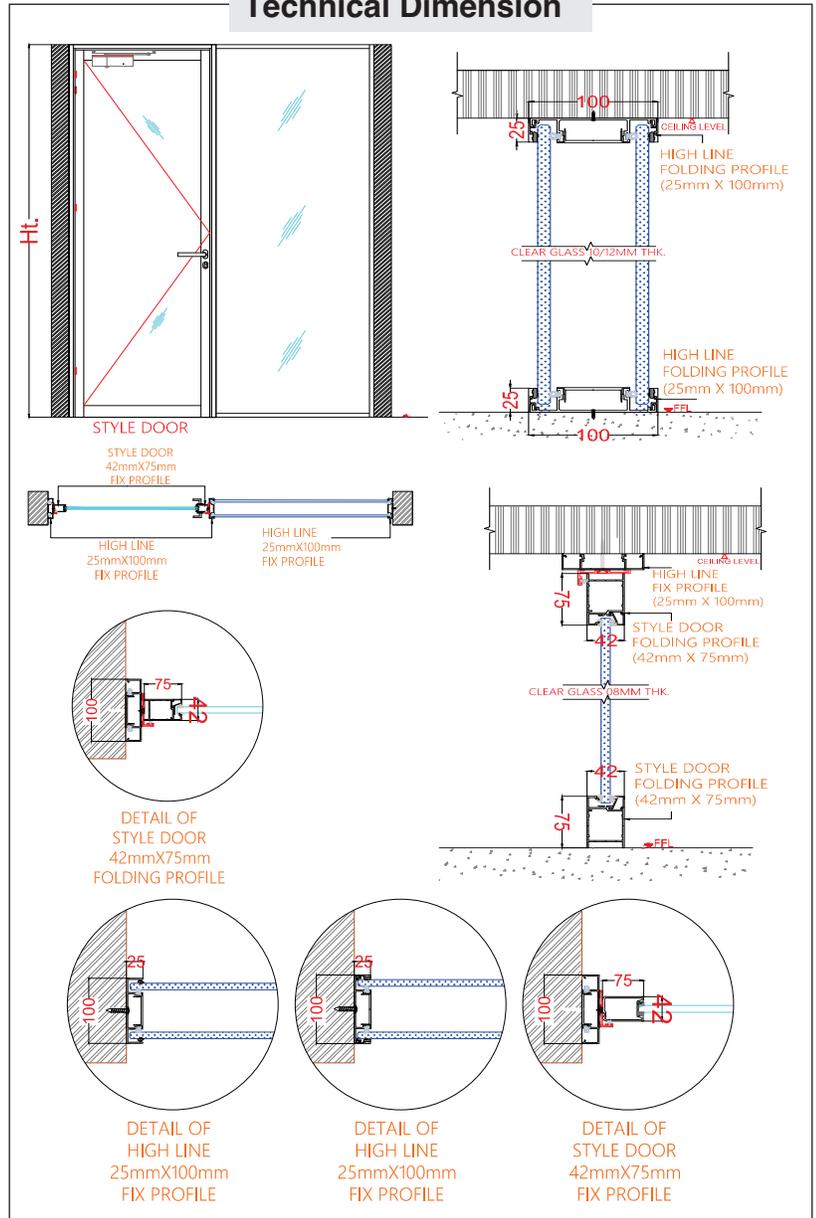
DEMOUNTABLE ALUMINUM PARTITION SYSTEM

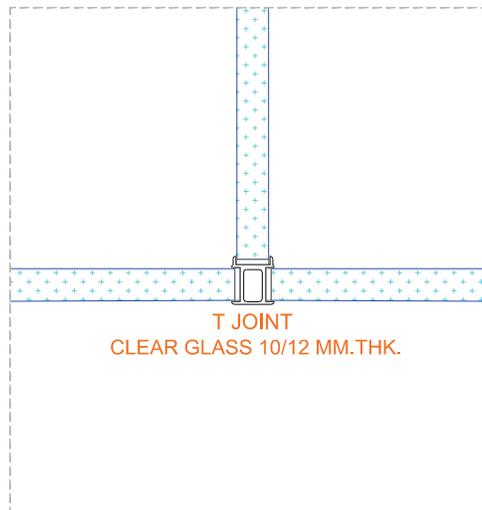**PRODUCT CODE** ▶ **HIGH LINE 100**

Technical Specification

- Profile-25mmX100mm.
- Aluminium Finish - Black Matt / Silver Matt / Black Brush Finish/Silver
- Brush Finish/Rose Gold /Powder Coat /or any other Anodized finishes Available.
- Partition Height upto 3600mm(12ft.).
- Double Glaze system.
- Demountable safety glass.
- Glass Thickness- 10/12mm.
- Door Options-Frame Door, Frameless Door, Style Door & Sliding door.
- Sound insulation – 40db.
- Easy Maintenance.

Technical Dimension

STYLE DOOR

STYLE DOOR
42mmX75mm
FIX PROFILE

HIGH LINE
25mmX100mm
FIX PROFILE

HIGH LINE
25mmX100mm
FIX PROFILE

DETAIL OF
STYLE DOOR
42mmX75mm
FOLDING PROFILE

HIGH LINE
FOLDING PROFILE
(25mm X 100mm)

HIGH LINE
FOLDING PROFILE
(25mm X 100mm)

CLEAR GLASS 10/12MM. THK.

HIGH LINE
FIX PROFILE
(25mm X 100mm)

STYLE DOOR
FOLDING PROFILE
(42mm X 75mm)

CLEAR GLASS 08MM. THK.

STYLE DOOR
FOLDING PROFILE
(42mm X 75mm)

DETAIL OF
HIGH LINE
25mmX100mm
FIX PROFILE

DETAIL OF
HIGH LINE
25mmX100mm
FIX PROFILE

DETAIL OF
STYLE DOOR
42mmX75mm
FIX PROFILE

CLEAR GLASS 10/12 MM.THK.

I JOINT

DETAIL OF 'I' JOINT PROFILE

T JOINT
CLEAR GLASS 10/12 MM.THK.

DETAIL OF ' T ' JOINT PROFILE

CLEAR GLASS 10/12 MM.THK.

L JOINT

DETAIL OF 'L' JOINT PROFILE

CODE	DISCRIPTION	UNIT	IMAGE
ON-ML-01-FX-10FT-SI ON-ML-01-FX-12FT-SI ON-ML-01-FX-10FT-BL ON-ML-01-FX-12FT-BL	PROBIZ DEMOUNTABLE PARTITION SYSTEM **MICRO LINE FIX 25X25MM** PROFILE SUITABLE FOR 10MM/12MM GLASS	3000MM 3650MM 3000MM 3650MM	
ON-ML-02-M-10FT-SI ON-ML-02-M-12FT-SI ON-ML-02-M-10FT-BL ON-ML-02-M-12FT-BL	PROBIZ DEMOUNTABLE PARTITION SYSTEM **MICRO LINE MALE 25X25MM** PROFILE SUITABLE FOR 10MM/12MM GLASS	3000MM 3650MM 3000MM 3650MM	
ON-ML-03-FE-10FT-SI ON-ML-03-FE-12FT-SI ON-ML-03-FE-10FT-BL ON-ML-03-FE-12FT-BL	PROBIZ DEMOUNTABLE PARTITION SYSTEM **MICRO LINE FEMALE 25X25MM** PROFILE SUITABLE FOR 10MM/12MM GLASS	3000MM 3650MM 3000MM 3650MM	
ON-SL-01-FX-10FT-SI ON-SL-01-FX-12FT-SI ON-SL-01-FX-10FT-BL ON-SL-01-FX-12FT-BL	PROBIZ DEMOUNTABLE PARTITION SYSTEM **SLIM LINE FIX 25X45MM** PROFILE SUITABLE FOR 10MM/12MM GLASS	3000MM 3650MM 3000MM 3650MM	
ON-SL-02-M-10FT-SI ON-SL-02-M-12FT-SI ON-SL-02-M-10FT-BL ON-SL-02-M-12FT-BL	PROBIZ DEMOUNTABLE PARTITION SYSTEM **SLIM LINE MALE 25X45MM** PROFILE SUITABLE FOR 10MM/12MM GLASS	3000MM 3650MM 3000MM 3650MM	
ON-SL-03-FE-10FT-SI ON-SL-03-FE-12FT-SI ON-SL-03-FE-10FT-BL ON-SL-03-FE-12FT-BL	PROBIZ DEMOUNTABLE PARTITION SYSTEM **SLIM LINE FEMALE 25X45MM** PROFILE SUITABLE FOR 10MM/12MM GLASS	3000MM 3650MM 3000MM 3650MM	
ON-SLB-05-M-10FT-SI ON-SLB-05-M-12FT-SI ON-SLB-05-M-10FT-BL ON-SLB-05-M-12FT-BL	PROBIZ DEMOUNTABLE PARTITION SYSTEM **SLIM LINE BLOCK MALE 25X45MM** PROFILE SUITABLE FOR 10MM/12MM GLASS	3000MM 3650MM 3000MM 3650MM	
ON-SLB-06-FE-10FT-SI ON-SLB-06-FE-12FT-SI ON-SLB-06-FE-10FT-BL ON-SLB-06-FE-12FT-BL	PROBIZ DEMOUNTABLE PARTITION SYSTEM **SLIM LINE BLOCK FEMALE 25X45MM** PROFILE SUITABLE FOR 10MM/12MM GLASS	3000MM 3650MM 3000MM 3650MM	
ON-SD-01-FX-8.5FT-SI ON-SD-01-FX-8.5FT-BL	PROBIZ DEMOUNTABLE PARTITION SYSTEM **STYLE DOOR FIX 35X60MM** PROFILE SUITABLE FOR 08MM GLASS	2500MM	
ON-SD-02-M-10FT-SI ON-SD-02-M-10FT-BL	PROBIZ DEMOUNTABLE PARTITION SYSTEM **STYLE DOOR MALE 35X60MM** PROFILE SUITABLE FOR 08MM GLASS	3600MM	
ON-SD-03-F-10FT-SI ON-SD-03-F-10FT-BL	PROBIZ DEMOUNTABLE PARTITION SYSTEM **STYLE DOOR FEMALE 35X60MM** PROFILE SUITABLE FOR 08MM GLASS	3600MM	
ON-DP-01-10FT-SI ON-DP-01-12FT-SI ON-DP-01-10FT-BL ON-DP-01-12FT-BL	PROBIZ DEMOUNTABLE PARTITION SYSTEM **SLIM LINE D-PATTI** SUITABLE FOR SLIM LINE 25X45MM PROFILE.	3000MM 3650MM 3000MM 3650MM	

ON-SFC-01-10FT-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **SLIM LINE SNAP FIT COVER** SUITABLE FOR SLIM LINE 25X45 PROFILE.	3000MM	
ON-SFC-01-12FT-SI		3650MM	
ON-SFC-01-10FT-BL		3000MM	
ON-SFC-01-12FT-BL		3650MM	
ON-IP-01-10MM-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **I-PATTI** SUITABLE FOR **10MM GLASS.**	3000MM	
ON-IP-01-10MM-BL		3000MM	
ON-IP-02-12MM-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **I-PATTI** SUITABLE FOR **12MM GLASS.**	3000MM	
ON-IP-02-12MM-BL		3000MM	
ON-LP-01-10MM-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **L-PATTI** SUITABLE FOR **10MM GLASS.**	3000MM	
ON-LP-01-10MM-BL		3000MM	
ON-LP-02-12MM-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **L-PATTI** SUITABLE FOR **12MM GLASS.**	3000MM	
ON-LP-02-12MM-BL		3000MM	
ON-TP-01-10MM-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **T-PATTI** SUITABLE FOR **10MM GLASS.**	3000MM	
ON-TP-01-10MM-BL		3000MM	
ON-TP-02-12MM-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **T-PATTI** SUITABLE FOR **12MM GLASS.**	3000MM	
ON-TP-02-12MM-BL		3000MM	
GASKET-01	PROBIZ DEMOUNTABLE PARTITION SYSTEM **GASKET FOR 10MM/12MM GLASS** SUITABLE FOR MICRO LINE PROFILE.		
GASKET-02	PROBIZ DEMOUNTABLE PARTITION SYSTEM **GASKET FOR 08MM/10MM/12MM GLASS** SUITABLE FOR SLIM LINE AND SLTYLE DOOR PROFILE.		
GASKET-03	PROBIZ DEMOUNTABLE PARTITION SYSTEM **GASKET FOR D-PATTI**		
GASKET-04	PROBIZ DEMOUNTABLE PARTITION SYSTEM **GASKET FOR D-PATTI**		
ON-FDH-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **FLUSH DOOR HINGES** SUITABLE FOR WOODEN/STYLE DOOR	1 PAIR	
ON-FDH-BL		1 PAIR	
ON-GDH-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **GLASS DOOR HINGES** SUITABLE FOR GLASS DOOR	1 PAIR	
ON-GDH-BL		1 PAIR	
ON-SDP-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **SADDLE PLATE** SUITABLE FOR GLASS DOOR CLOSER	1 PCS.	
ON-SDP-BL		1 PCS.	
ON-SDL-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **STUDIO LOCK** SUITABLE FOR GLASS DOOR	1 PCS.	
ON-SDL-BL		1 PCS.	
ON-QH-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **Q HANDLE** SUITABLE FOR WOODEN/GLASS/STYLE DOOR	1 PCS.	
ON-QH-BL		1 PCS.	

ON-CP-01-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **CARPET PROFILE 28MM**	1 PCS.	
ON-CP-01-BL		1 PCS.	
ON-HT-01-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **HAT PROFILE.**	1 PCS.	
ON-HT-01-BL		1 PCS.	
ON-CG-01-SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM **CORNER GUARD PROFILE 15MM.**	1 PCS.	
ON-CG-01-BL		1 PCS.	
OSKT 200 -SI	PROBIZ DEMOUNTABLE PARTITION SYSTEM SKIRTING PROFILE	1 PCS.	
OSKT 200 -BL		1 PCS.	
OSKT 300-SI		1 PCS.	
OSKT 300-BL		1 PCS.	
OSKT 400-SI		1 PCS.	
OSKT 400-BL		1 PCS.	
OCF-001	PROBIZ DEMOUNTABLE PARTITION SYSTEM SKIRTING **CORNER CAP FITTING 50/75/100MM** SUITABLE FOR OSKT-200,300,400)-SILVER/BLACK	1 PCS.	
OCF-002	PROBIZ DEMOUNTABLE PARTITION SYSTEM SKIRTING **END CAP FITTING 50/75/100MM** SUITABLE FOR OSKT-200,300,400)-SILVER/BLACK	1 PCS.	
OCF-003	PROBIZ DEMOUNTABLE PARTITION SYSTEM SKIRTING **JOINT CAP FITTING-270 50/75/100MM** SUITABLE FOR OSKT-200,300,400)-SILVER/BLACK	1 PCS.	
OCF-004	PROBIZ DEMOUNTABLE PARTITION SYSTEM SKIRTING **JOINT CAP FITTING-180 50/75/100MM** SUITABLE FOR OSKT-200,300,400)-SILVER/BLACK	1 PCS.	

PROBIZZ™
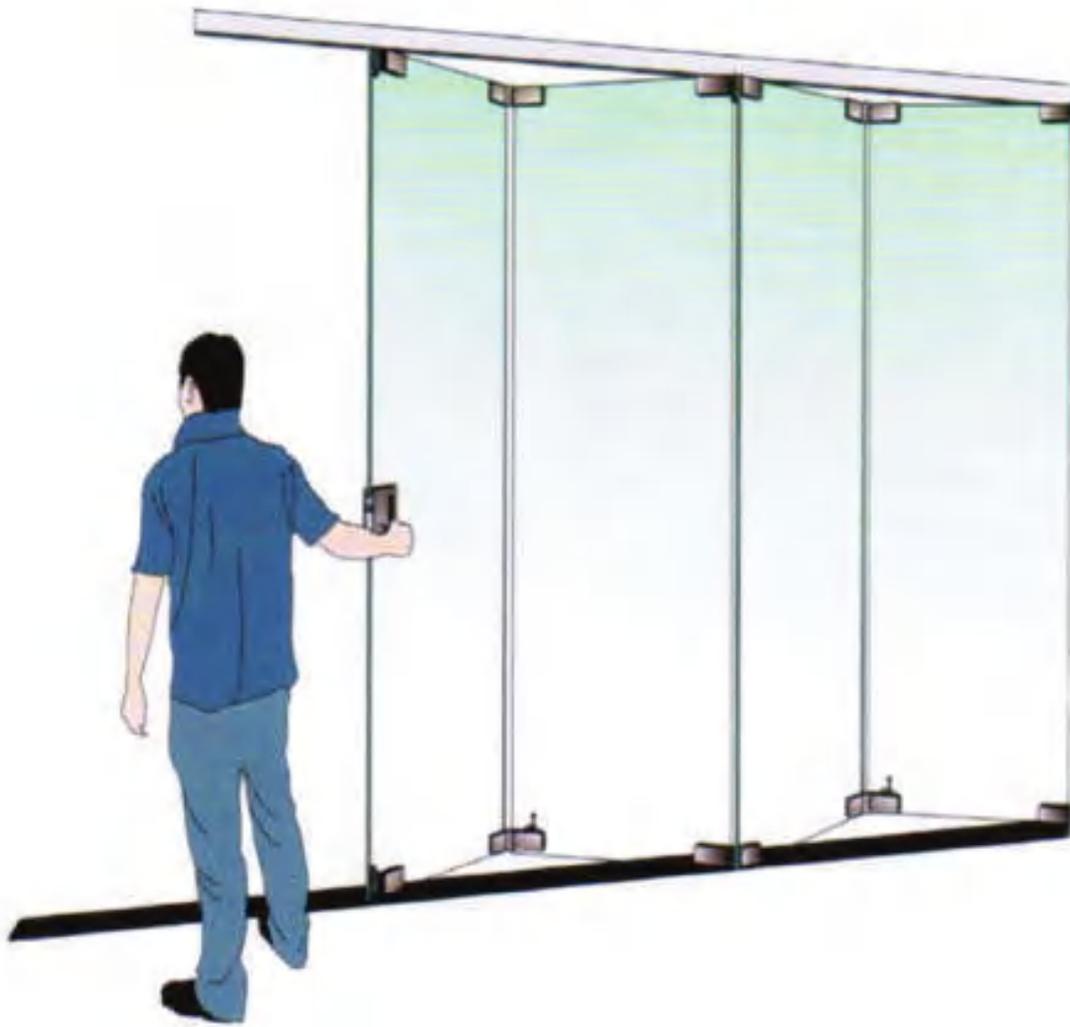
GLASS SLIDING & FOLDING SYSTEMS

Glass To Glass Centre Hinge

PRODUCT CODE ▶ **SB-SFS-01**

Technical Dimension
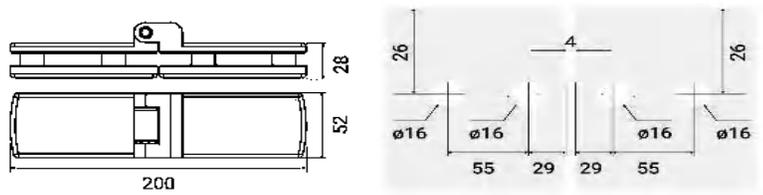
28
52
200
26
4
26
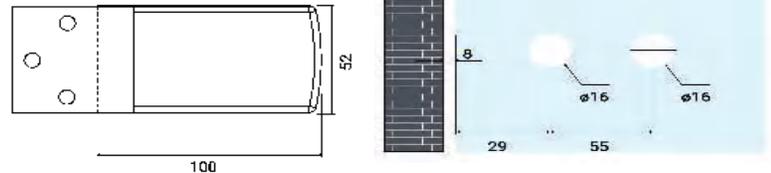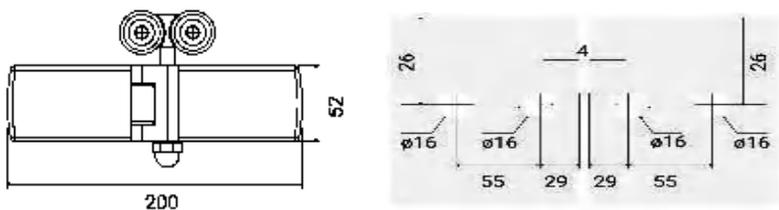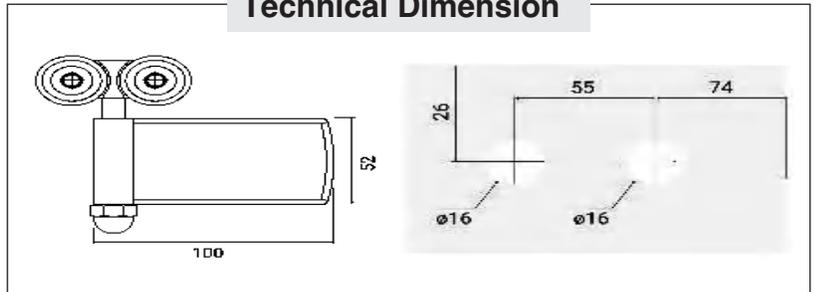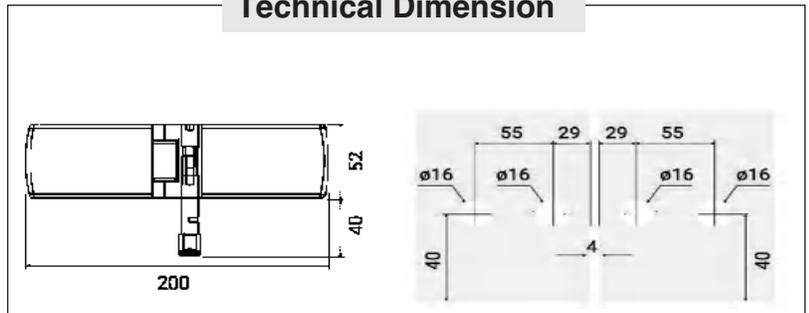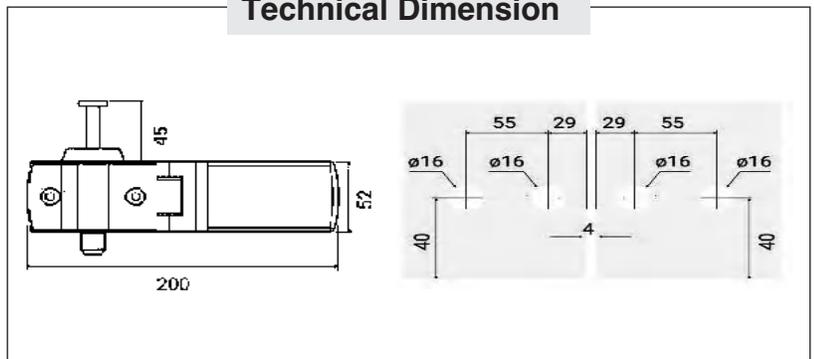ø16 ø16 ø16 ø16
55 29 29 55

Features

- ➤ SS 304 for high corrosion resistance
- ➤ For robust in construction
- ➤ Compact size for better look
- ➤ Suitable for upto 100kg glass pannel

Wall To Glass Hinge

PRODUCT CODE ▶ **SB-SFS-02**

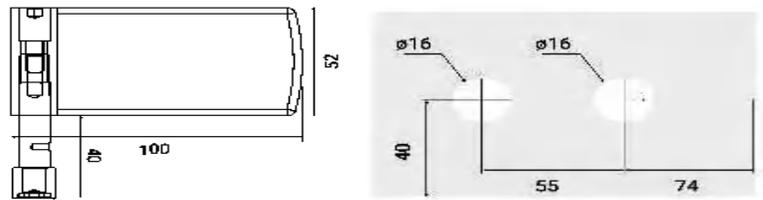**Technical Dimension**

52
100
8
ø16 ø16
29 55

Features

- ➤ SS 304 for high corrosion resistance
- ➤ For robust in construction
- ➤ Compact size for better look
- ➤ Suitable for upto 100kg glass pannel

Center Hinge With Roller

PRODUCT CODE ▶ **SB-SFS-03**

Technical Dimension

52
200
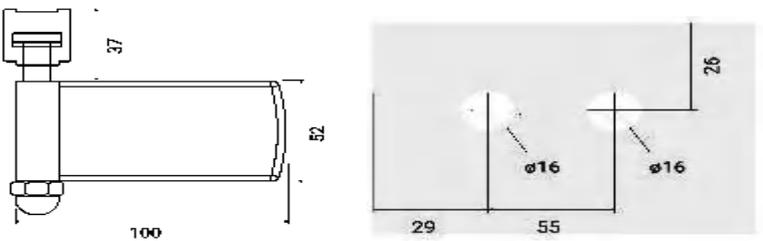26
4
26
ø16 ø16 ø16 ø16
55 29 29 55

Features

- ➤ SS 304 for high corrosion resistance
- ➤ For robust in construction
- ➤ Compact size for better look
- ➤ Suitable for upto 100kg glass pannel

End Hinge With Roller

PRODUCT CODE ▶ SB-SFS-04

Technical Dimension

Features

➢ SS 304 for high corrosion resistance
➢ For robust in construction
➢ Compact size for better look
➢ Suitable for upto 100kg glass pannel

Glass To Glass Center Hinge
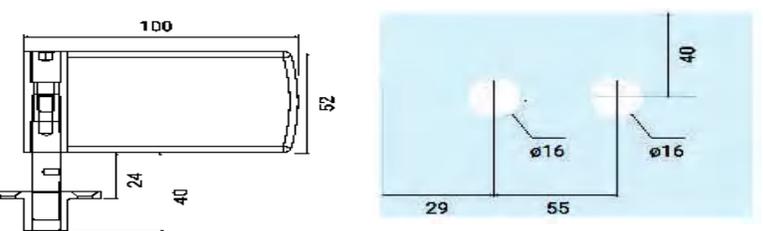
PRODUCT CODE ▶ SB-SFS-05

Technical Dimension

Features

➢ SS 304 for high corrosion resistance
➢ For robust in construction
➢ Compact size for better look
➢ Suitable for upto 100kg glass pannel

Glass To Glass Center Hinge With Lock

PRODUCT CODE ▶ SB-SFS-06
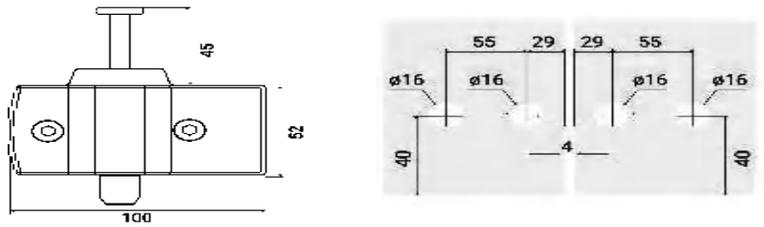
Technical Dimension

Features

➢ SS 304 for high corrosion resistance
➢ For robust in construction
➢ Compact size for better look
➢ Suitable for upto 100kg glass pannel

End Hinge With Guide

PRODUCT CODE ▶ **SB-SFS-07**

Technical Dimension

Features

➤ SS 304 for high corrosion resistance
➤ For robust in construction
➤ Compact size for better look
➤ Suitable for upto 100kg glass pannel

Fixed Hinge

PRODUCT CODE ▶ **SB-SFS-08**

Technical Dimension

Features

➤ SS 304 for high corrosion resistance
➤ For robust in construction
➤ Compact size for better look
➤ Suitable for upto 100kg glass pannel

Floor Fixed Hinge

PRODUCT CODE ▶ **SB-SFS-09**

Technical Dimension

Features

➤ SS 304 for high corrosion resistance
➤ For robust in construction
➤ Compact size for better look
➤ Suitable for upto 100kg glass pannel

End Panel Fitting with Bottom Pivot (L/R)
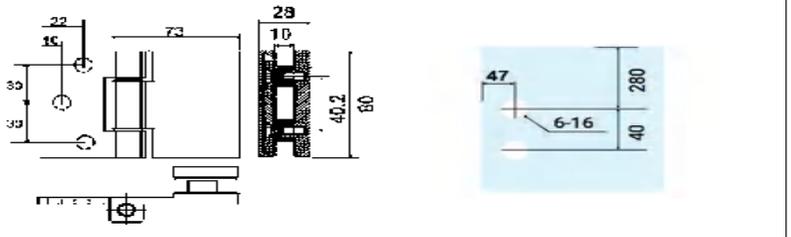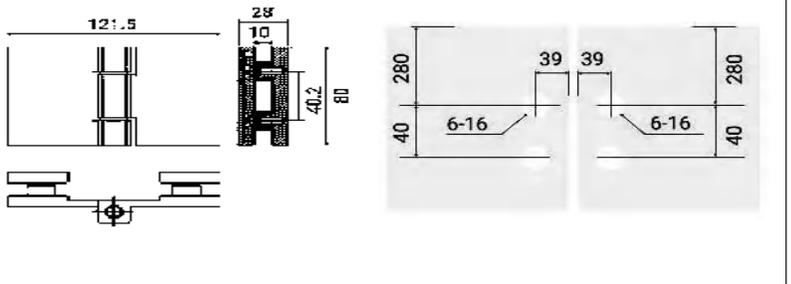
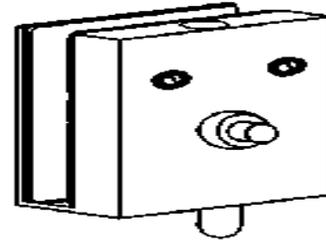PRODUCT CODE ▶ **SB-SFS-10**

Technical Dimension

Features

➢ SS 304 for high corrosion resistance
➢ For robust in construction
➢ Compact size for better look
➢ Suitable for upto 100kg glass pannel

Wall To Glass Hinge

PRODUCT CODE ▶ **PB-CSFS-01**

Technical Dimension

Features
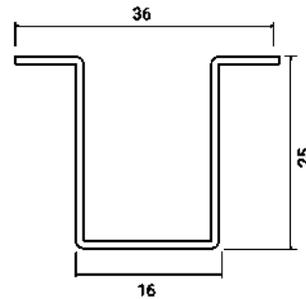
➢ SS 304 for high corrosion resistance
➢ For robust in construction
➢ Compact size for better look
➢ Suitable for upto 100kg glass pannel

Glass To Glass Hinge

PRODUCT CODE ▶ **PB-CSFS-02**

Technical Dimension

Features

➢ SS 304 for high corrosion resistance
➢ For robust in construction
➢ Compact size for better look
➢ Suitable for upto 100kg glass pannel

Push Bottom Lock

PRODUCT CODE ▸ **PB-CSFS-03**

Technical Dimension

Features

- ➤ SS 304 for high corrosion resistance
- ➤ For robust in construction
- ➤ Compact size for better look
- ➤ Suitable for upto 100kg glass pannel

Bottom Floor Track

PRODUCT CODE ▸ **3311**

### Technical Dimension

36

25

16

Features

- ➤ SS 304 material for high corrosion resistance
- ➤ Robust in construction
- ➤ Compact size for better look

Top Sliding Track

PRODUCT CODE ▸ **3312**

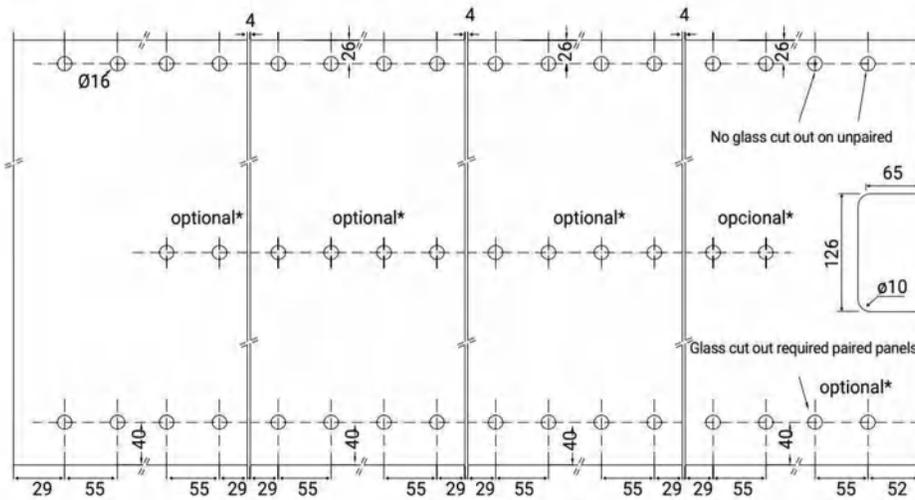### Technical Dimension

46

7

42

16+0.4

28

45

Features

- ➤ Suitable for folding door
- ➤ Aluminum anodized Track
- ➤ Robust in construction
- ➤ For ceiling mounting
- ➤ Compact size for better look

OPENING OPTIONS
For folding doors up to 70 Kg of weight per panel

- Ø16
- No glass cut out on unpaired
- optional*
- optional*
- optional*
- opcional*
- 65
- 126
- ø10
- Glass cut out required paired panels
- optional*
- 29 | 55 | 55 | 29 | 29 | 55 | 55 | 29 | 29 | 55 | 55 | 29 | 29 | 55 | 55 | 52
- 40 | 40 | 40 | 40

The system is recommended for openings of 2.50 mts height and 8 mts wide, with a maximum of 10 panels up to 80 cm width.
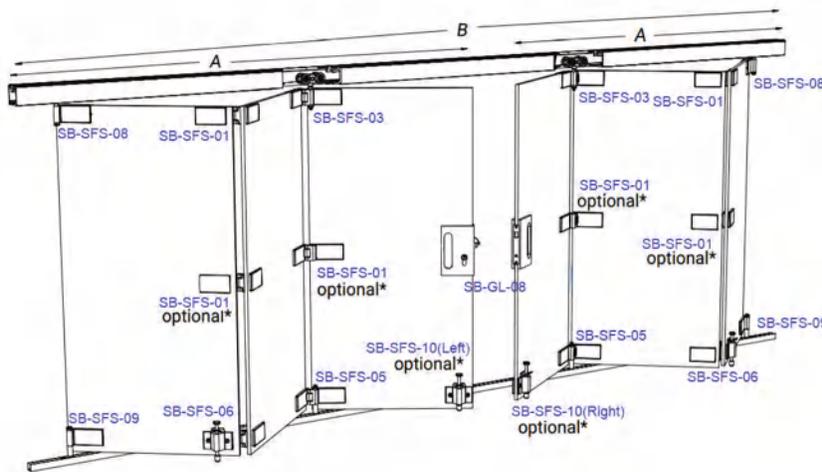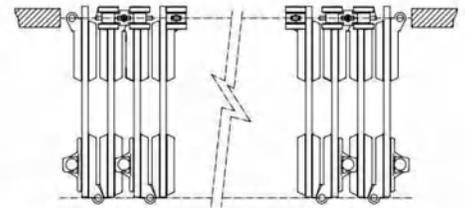
| References needed for installation of 3 panels		
CODE	3 Panels (A)	3+3 Panels (B)
SB – SFS – 01	1 / 3 * Nos	2 / 6* Nos
SB – SFS – 03	1 Nos	2 Nos
SB – SFS – 05	1 Nos	2 Nos
SB – SFS – 06	1 Nos	2 Nos
SB – SFS – 08	1 Nos	2 Nos
SB – SFS – 09	1 Nos	2 Nos
SB – SFS – 10	1* Nos	2* Nos
SB – GL – 07	1 Nos	-
SB – GL – 08	-	1 Nos
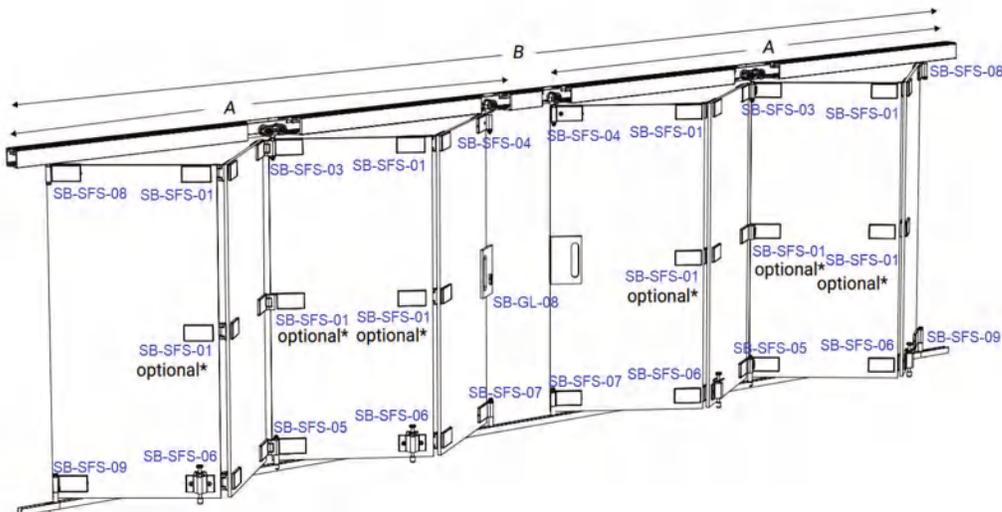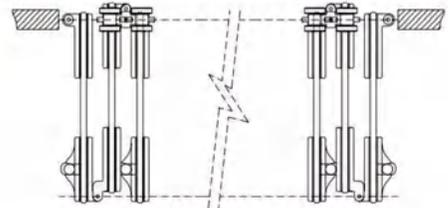
References needed for installation of 4 panels		
CODE	4 Panels (A)	4+4 Panels (B)
SB – SFS – 01	2 / 5 * Nos	4 / 10* Nos
SB – SFS – 03	1 Nos	2 Nos
SB – SFS – 04	1 Nos	2 Nos
SB – SFS – 05	1 Nos	2 Nos
SB – SFS – 06	2 Nos	4 Nos
SB – SFS – 07	1 Nos	2 Nos
SB – SFS – 08	1 Nos	2 Nos
SB – SFS – 09	1 Nos	2 Nos
SB – GL – 07	1 Nos	-
SB – GL – 08	-	1 Nos
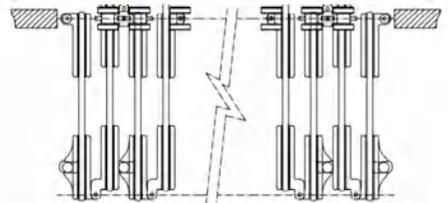
CALCULATION FOR 2 PANEL OPENING
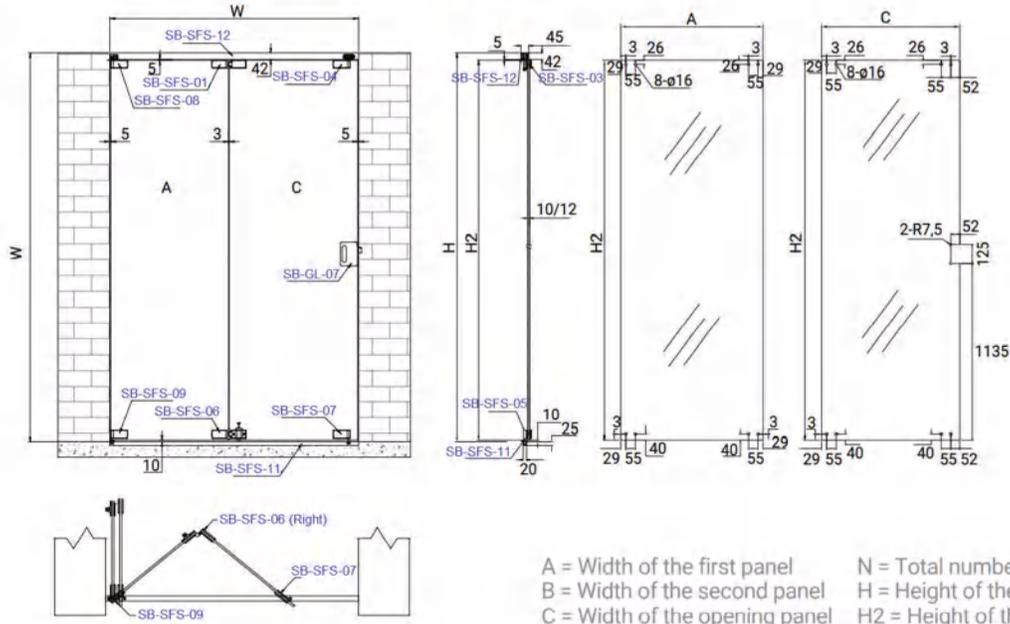
A = Width of the first panel
B = Width of the second panel
C = Width of the opening panel
N = Total number of panels
H = Height of the opening
H2 = Height of the glass

$$A = \frac{W - 3N - 35}{N} - 17 \qquad C = \frac{W - 3N - 35}{N} + 45$$

$$H2 = H - 57$$

CALCULATION FOR UNEVEN NO. OF PANEL OPENINGS
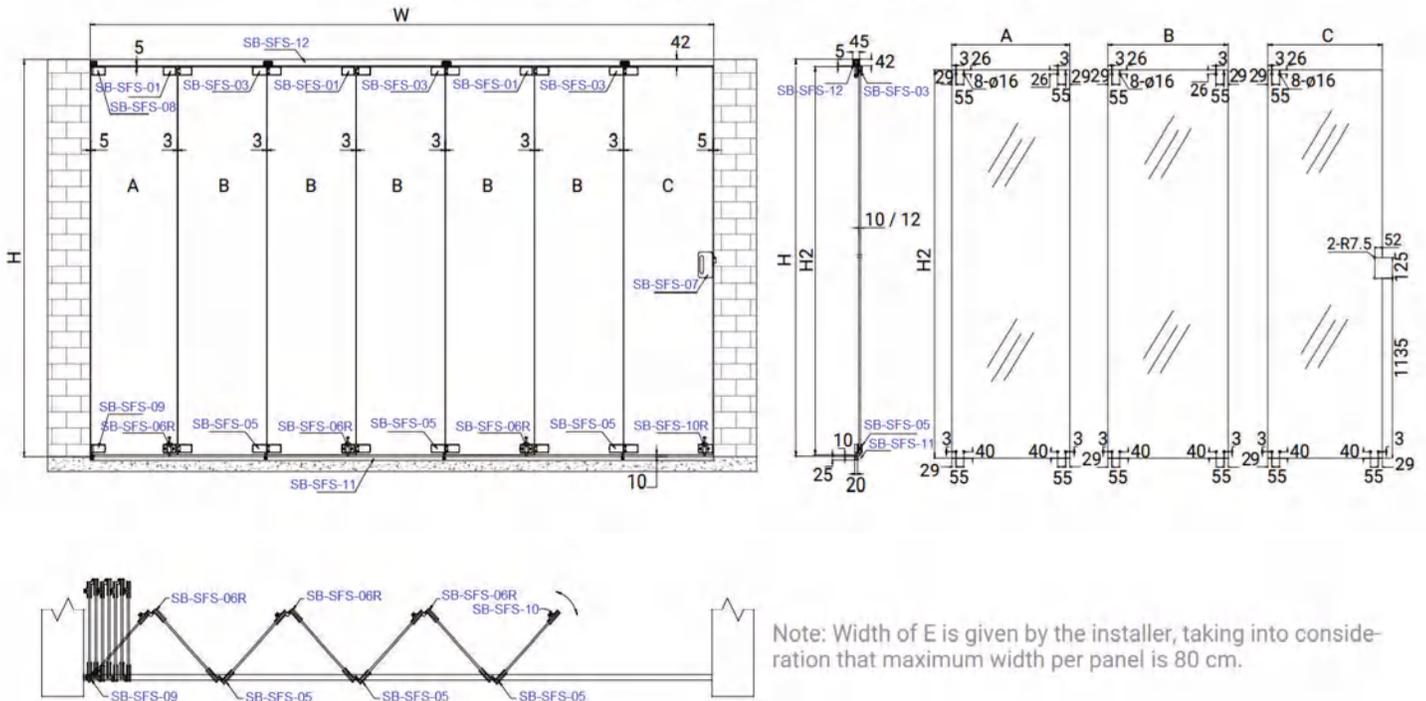
Note: Width of E is given by the installer, taking into consideration that maximum width per panel is 80 cm.

$$A = \frac{W - C - 3N + 10}{N-1} - 17$$

$$B = \frac{W - C - 3N + 10}{N-1} \qquad H2 = H - 57$$

A = Width of the first panel
B = Width of the second panel
C = Width of the opening panel
N = Total number of panels
W = Width of the opening
H = Height of the opening
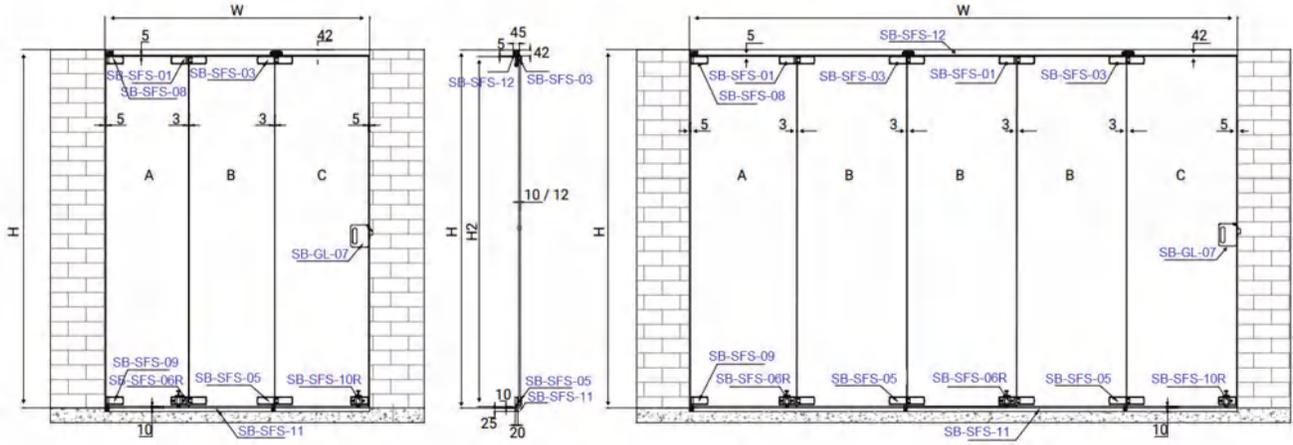H2 = Height of the glass

CALCULATION FOR UNEVEN NUMBER OF PANELS

$$A = \frac{W - C - 3N + 10}{N-1} - 17$$

$$B = \frac{W - C - 3N + 10}{N-1}$$

$$H2 = H - 57$$

A= Width of the first panel
B= Width of the second panel
C= Width of the opening panel
N = Total number of panels

W = Width of the opening
H = Height of the opening
H2 = Height of the glass

CALCULATION FOR EVEN PANELS

$$A = \frac{W - 3N - 35}{N} - 17$$

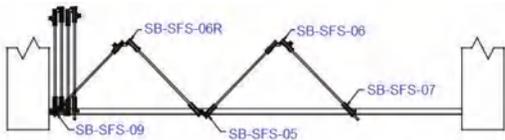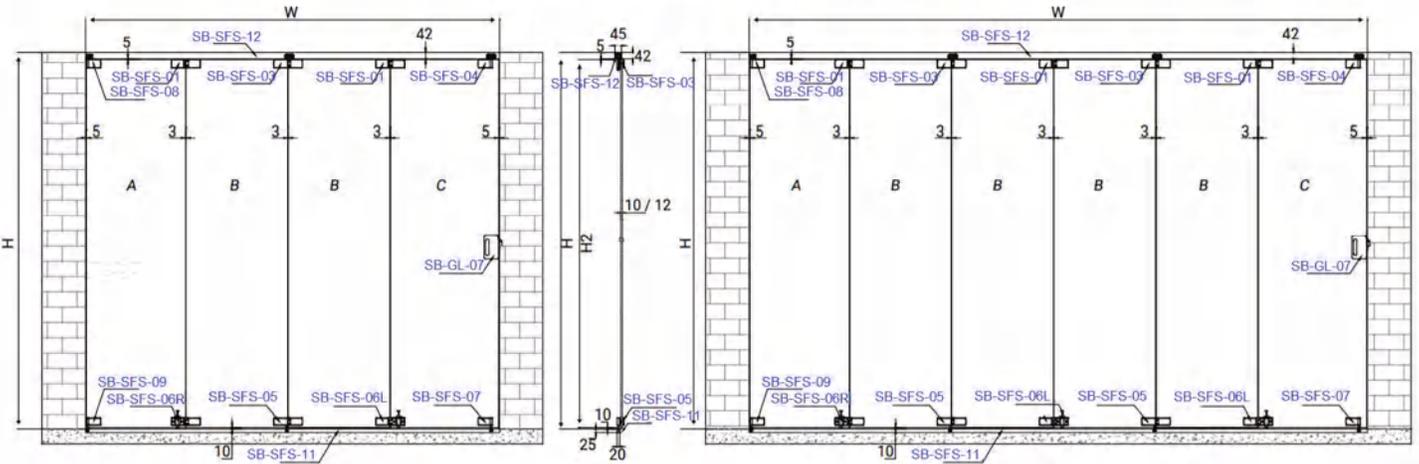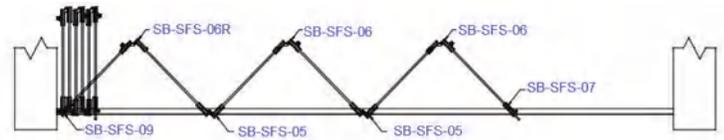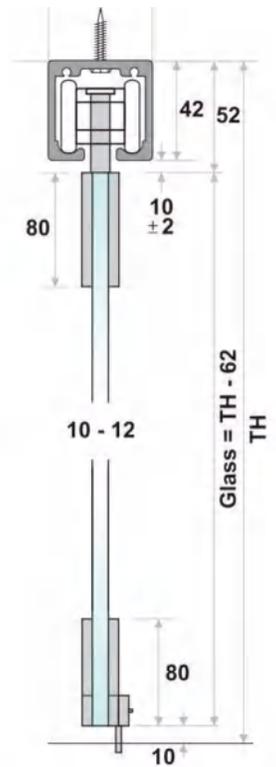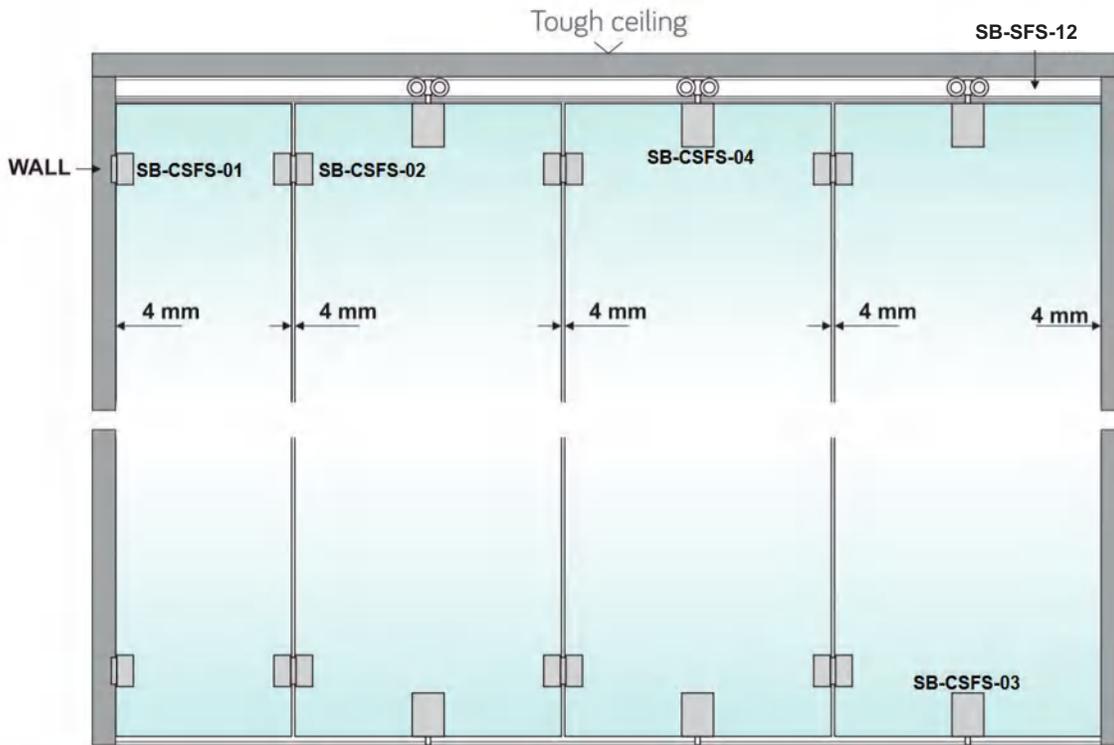$$C = \frac{W - 3N - 35}{N} + 45$$

$$B = \frac{W - 3N - 35}{N}$$

$$H2 = H - 57$$

A= Width of the first panel
B= Width of the second panel
C= Width of the opening panel
N = Total number of panels

W = Width of the opening
H = Height of the opening
H2 = Height of the glass

Tough ceiling

SB-SFS-12

WALL

SB-CSFS-01   SB-CSFS-02   SB-CSFS-04

4 mm   4 mm   4 mm   4 mm   4 mm

SB-CSFS-03

42 | 52

80

10 ±2

10 - 12

Glass = TH - 62

TH

80

10

Door width	Start panel with top and bottom wall to glass hinge	Folding panel with top - bottom roller and connected hinge device	Folding panel with top - bottom roller and connected hinge device	Folding panel with top - bottom roller and connected hinge device
	Folding Door/2	800mm	800mm	800mm

OutSide

InSide
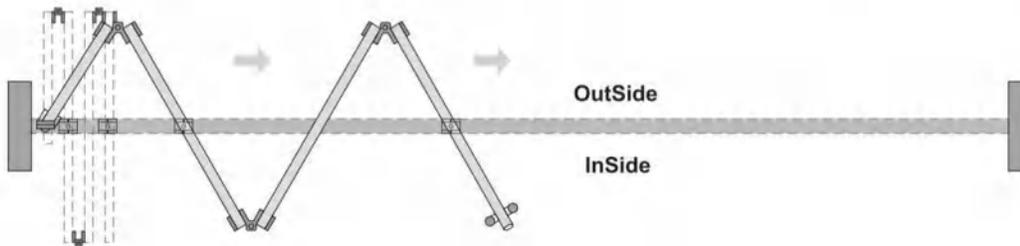
Calculation of glass weight :

Thickness of glass	Approx weight Per Sq. Ft.
6mm	1.400 kg
8mm	1.900 kg
10mm	2.400 kg
12mm	2.900 kg

max. 800 mm

max. 2700 mm

max. 75 Kg

10 to 12 mm
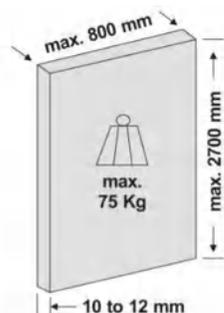
Features :

- Advanced glass center folding mechanism for up to 6 frame less glass panels with professional design concept.
- Center folding system is designed for both interior and exterior applications
- Panels are connected using a hinges system
- Nylon wheels integrated bearing for quite easy running
- Maximum weight of door : 75kgs/Panel
- Minimum Panel Width   : 500mm

PROBIZZ DOOR HARDWARE FITTINGS

DOOR HINGES

MORTISE LOCKS

DOOR CLOSERS

DOOR ACCESSORIES

PROBIZZ FURNITURE HARDWARE FITTINGS

DRAWER CHANNELS

SOFT CLOSINGS HINGES

FURNITURE LOCKS

FURNITURE HANDLES

PROBIZZ GLASS FITTINGS

FLOOR SPRINGS

PATCH FITTINGS

SPIDER FITTINGS

PULL HANDLES

PROBIZZ RAILING FITTINGS

BALUSTRADES

SPIGOTS

RAILING ACCESSORIES

HAND RAIL

Customise Your Own

SS 304 & SS 202

The Little Abode

FIRE SAFETY DOOR
DO NOT OBSTRUCT
DO NOT KEEP OPEN

PLEASE DON'T SIT
PLEASE DON'T SIT
PLEASE DON'T SIT
PLEASE DON'T TOUCH
PLEASE DON'T TOUCH
PLEASE DON'T TOUCH
PHOTO & VIDEO PROHIBITED
PLEASE REMOVE YOUR FOOTWEAR HERE

RESTROOM

22 Main Street

Exam Room 1

RESTROOM

C12
Harrington Court

PULL

PUSH

RAPID COMPRESSION MACHINE
LUCAS
PRODUCTS & SERVICES
SERIAL NUMBER: 11-035
RSA CONTRACT NUMBER: 381168-1   Equipment No: 2033986
YEAR   2013   KAUST
CATEGORY   CAT II. MODULE A1
TEST PRESSURE   216 Barg
TEST DATE   JUN 2013
CERTIFICATION BODY   RSA
MAX OPERATING DRIVE PRESSURE   200 Barg
MAX OPERATING DRIVE TEMPERATURE   200 C.
CE 0040   UKL   UK Marine Technology Ltd.
                                69 Piccadilly
                                Manchester, M1 2AG

202

11A

OUR ESTEEMED CLIENTS

Standard Chartered

ICICI Bank

TATA MOTORS

HDFC BANK

Birla Sun Life

AXIS BANK

BIG BAZAAR

Reliancefresh

D Mart

bharti AXA general insurance

LIC

airtel

LARSEN & TOUBRO

PUDUCHERI RAJBHAWAN

भारतीय प्रौद्योगिकी संस्थान दिल्ली
Indian Institute of Technology Delhi

नालको NALCO

IRCTC

CATERPILLAR

Indo-Tibetan Border Police

भारतीय प्रबंध संस्थान बेंगलूर
INDIAN INSTITUTE OF MANAGEMENT BANGALORE

Comptroller and Auditor General (CAG)

HYATT REGENCY

OUR GLOBAL PRESENCE

NEPAL | BHUTAN | SRI LANKA | MALDIVES | MYANMAR | VIETNAM | CAMBODIA | SURINAME

ZAMBIA | MALAWI | TANZANIA | MOZAMBIQUE | NIGERIA | UGANDA | KENYA | UNITED KINGDOM

PROBIZ INDIA is also A Leading Producer & Exporter of Fire Doors, Office Chairs & Natural Stones - Granites•Marbles•Sand Stones•Kota Stones•Lime Stones

Natural Stones

Fire Rated Doors

PROBIZZ™

An ISO 9001:2015 Company

PRO BIZ INDIA PVT LTD
AMAM MFG. PVT LTD
PRO BIZ INTERNATIONAL
PRO BIZ OVERSEAS

24, M.G. Nagar,
Jaipur, India- 302021

PRO BIZ PRIME

1456, Anand Nagar, Church lane, Old H B Road, Ranchi - 834001